

FÖRKLARINGAR:

TEXTILMATTÄ . LEVERANTÖR EGETAEPPER:

Cultures

Quality Name


Highline 1100 WT

Structure	ISO 2424	Tufted out pile
Pile material	DIR 96/73.96/74	Regenerated and regenerable PA
Pile yarn weight	ETL	1.100 g/m2
Total carpet weight	ISO 8543	Apr 2.550 g/m2
Dimensions	ISO 3018	Approx. 400 cm
Performance areas	EN 1307	Class 33 - Commercial - Heavy
Acou.insu. from impact noise	ISO 717-2	29 dB
Acoustical absorption	ISO 354	0,20 aVv
Fire classification	EN 13501-1 Euroclass	Cfl-s1

For full technical specs and installation and maintenance guides see www.egecarpets.com

This is a SAMPLE, made on a laboratory machine. Consequently there may be minor deviations with regard to colours, design and backing between sample and the production. If there is a need for full colour match, it will be necessary to make a full scale sample. Our repeating on-line sample is not guaranteed to one standard.

Sample ref: RF5595109

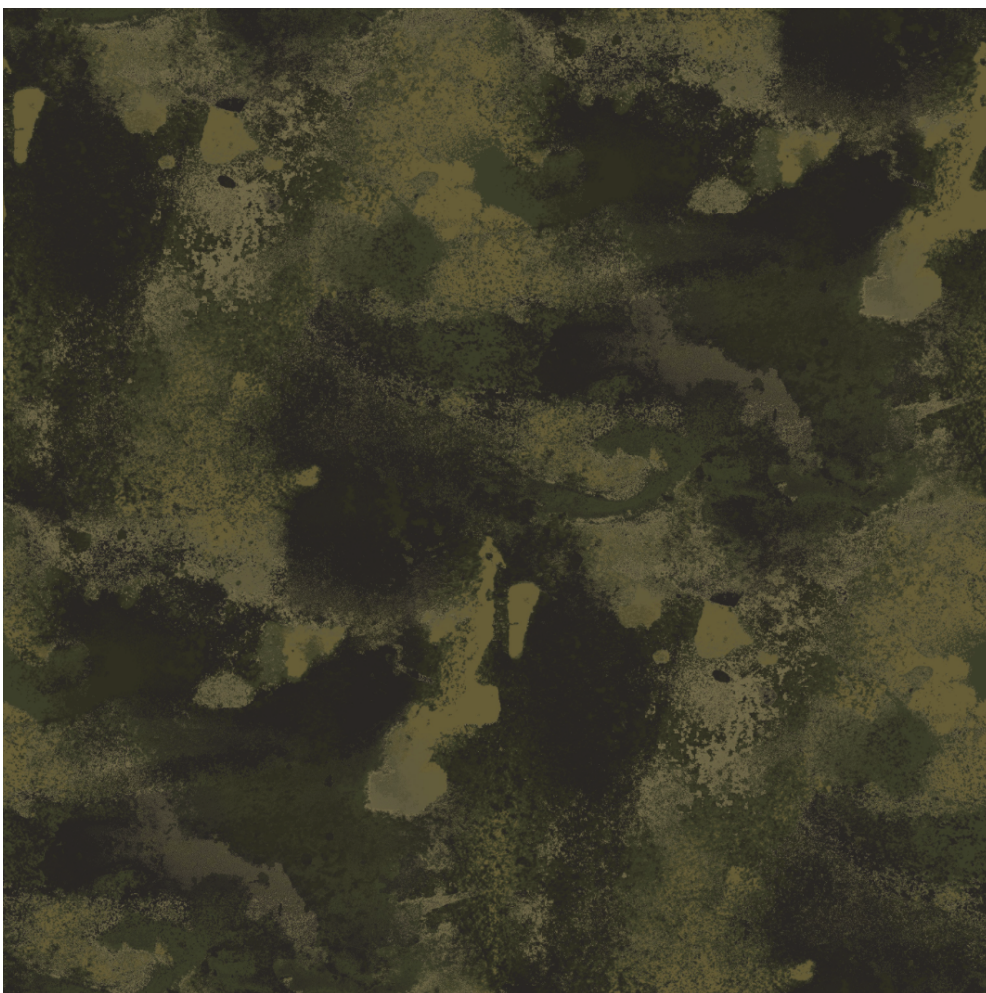

MATTMÖNSTER 4x4m

VINYLGOLV LEVERANTÖR AMTICO
STORLEK PLATTOR : 228,6X1219,2 MM
LÄGGS I FALLANDE LÄNGDER

Brushed Oak

AR0W7910

XTRA 228,6 x 1219,2 mm

amtico

signature



GOLV I WC:

J1515 AZUL OLIVE

Golv & Vagg

147x147 (mm)

Art nr 38314

0.99 m² per kartong

Rek. pris 1395 kr/m²

GOLV i duschdel
av HWC

J0505 AZUL OLIVE

Golv & Vagg

48x48 (mm)

Art nr 38305

0.99 m² per kartong

Rek. pris 2195 kr/m²

leverantör:
<https://bricmate.se/produkter/golv-vagg/j-azul-olive>



PROJEKT	INNEHÅLL	DATUM	RITN NR	SIGN	
MYRSTACKEN 32	MYRSTACKEN, PLAN GOLV COWORKING	2022-09-14	25	H.REHLE	Offpist arkitekter AB Villavägen 8a 18279 Stocksund 0705450802 h@offpistarkitekter.se